



## Connector **XL-LOK**<sup>®</sup>


### Connecting link **XL-LOK**<sup>®</sup> TWN 1820

Connecting links XL-LOK according to this THIELE Plant Standard (TWN) are designated for safe lifting, moving or slinging of weights. Capacity and product requirements are based on the EN 1677-1 taking a 25% improved working load limit into account.

Connecting links are certified and marked with the  4-stamp.

Connecting links are coated in RAL 5002 ultramarine blue.  
Spare parts are available according to TWN 1921.

**New**

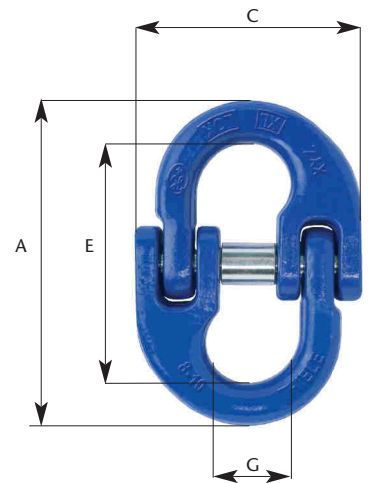

Trade Size	Article-No.	Working Load Limit [t max]	Dimensions [mm]						Weight approx. [kgs]
			E	G	A	C	B	F	
<b>6-XL</b>	F30807	1,40	45,0	14,0	61,0	38,5	12,2	7,6	0,07
<b>8-XL</b>	F30817	2,50	62,0	19,0	70,9	55,0	16,0	10,0	0,20
<b>10-XL</b>	F30827	4,00	72,0	23,8	85,0	65,5	18,0	12,6	0,35
<b>13-XL</b>	F30837	6,70	87,3	28,0	97,2	82,5	23,0	16,7	0,74
<b>16-XL</b>	F30847	10,00	105,0	34,3	146,2	109,0	31,5	20,6	1,16
<b>22-XL</b>	F30861	19,00	140,0	47,3	200,0	165,0	39,0	22,0	3,52

